



K2 150W

Industrial floodlight, up to 114lm/W, IP65 & IK08 rated

FEATURES

Wattage	150W
IP rating	IP65
IK rating	IK08
Dimmable	No
Input	220-240 V~ Surge protection 6KV/10KV
LED lifetime	50,000h L70 B10
SDCM	3SCDM
Flicker Free	Yes
Emergency version available	No

INSTALLATION INFORMATION

Install connector type	Flying lead
Inrush current	110A 0.2ms
Construction material	Aluminium alloy Tempered glass
Weight	5.00Kg
Maximum ambient temperature	-40°C to +50°C
SELV	Yes
Building regulations	Part P
Electric class (1, 2, 3)	1

PHOTOMETRICS @ 25°C

Product code	Finish	Wattage	Colour	Beam angle	CRI	lm	lm/W	lx at 1m
IFL15BX40	Black	150W	4000K	120°	80Ra	17100	114	5235
IFL15BX40100150	Black	150W	4000K	100°x150°	80Ra	17100	114	2966
IFL15BX30	Black	150W	3000K	120°	80Ra	17100	114	5235
IFL15BX30100150	Black	150W	3000K	100°x150°	80Ra	17100	114	2966

WIRING INFORMATION

Cable / flying lead	1000mm H05RN-F 3x1.0mm ² Ø7mm
Type of wiring required	Parallel

ACCESSORIES

N/A	No accessories required
-----	-------------------------

Floodlights.

01604 495 151
collingwoodlighting.com

@collingwoodLED

/collingwoodlighting

collingwoodled

GUARANTEE / WARRANTY

5 year extended guarantee

FEATURES & BENEFITS


Robust and can withstand tough environments

Ratchet points on bracket, tightened by allen key

Highly efficient 114lm/W

Surge protection
L/N-PE = 10KV
L-N = 6KV

Beam angle: 120° 100°x150°

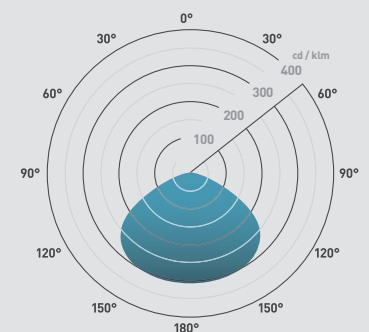

280mm

