

# JC71742 Skypack QR LED Batten 4ft Twin IP20 4000K 40W 4800Lm



## **Features & Benefits**

- Intelligent press release buttons for simple installation
- Ultra efficient, up to 120 lumens per circuit Watt
- Suspended LED tray for easy installation
- Press fit terminals, loop in loop out
- Rear and end conduit entry points
- Microwave dimmable options

### **General Information**

Ocherat ini ormation	
Product Group	LED - Surface
Product Range	Skypack™
Trade Name	Skypack™ QR
Light Source	LED
Light Source Features	Neutral White
Lighting Product Type	Linear Lighting
Product Shape	Rectangular
Mounting	Surface Mounted
Product Weight	2.2kg
Color Finish	White
Overall Dimensions	1220 x 70 x 76.5

#### **JCC Lighting**

Innovation Centre, Beeding Close, Southern Cross Trading Estate, Bognor Regis, West Sussex, PO22 9TS

Domestic, Commercial and Industrial Applications
Surface with Conduit Entry
IP20
Indoor
Made In China
2 years standard warranty extends to 5 years when registered within the first year of purchase (See Website for terms and conditions)
Ledtu
Runlite

# **Electrical**

Voltage Rating	220-240
Secondary Running Current	1050mA
Primary Running Current	250mA
Operating Frequency (Hz)	50/60Hz
CC or CV	Constant Current
Luminaire Circuit Wattage	40
Class	Class I
Output Voltage (V)	27-38VDC
EMC Compliant (EN55015)	Yes
Power Factor Correction	0.9
Input Electrical Connections	Live, Earth & Neutral
Dimmable	No

## **Thermals**

Room Ambient Temperature Not To Exceed

30°C

## Performance Data

A+
4800
120
54000
Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.
80-89
80
4000K
120-degree
100

#### **JCC Lighting**

Innovation Centre, Beeding Close, Southern Cross Trading Estate, Bognor Regis, West Sussex, PO22 9TS

Photometry Available	Yes

# Construction

Primary Material	Steel
Diffuser	Polycarbonate
Outer Diffuser	Polycarbonate


# **Packaging**

Quantity Per Outer Carton	10
Bar Code EAN Number	5052544080456
Packaged Weight	2.10kg

# Standards & Approvals

Listings	CE
Listings	RoHS
Manufactured In Accordance To	BS EN 60598:2015, 2-1
CE Marked	Yes
Batch Coded	Yes
WEEE Symbol	Yes
Certificate Of Conformity	Yes: available on request.
Accredited Members	LIA, ISO9001:2015, ISO14001:2015

Innovation Centre, Beeding Close, Southern Cross Trading Estate, Bognor Regis, West Sussex, PO22 9TS

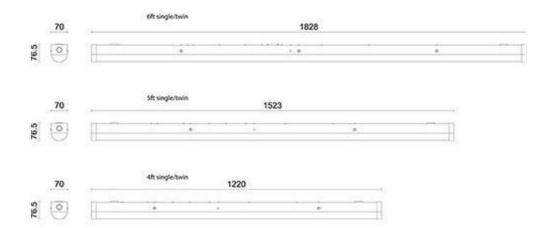

#### JCC Lighting

Innovation Centre, Beeding Close, Southern Cross Trading Estate, Bognor Regis, West Sussex, PO22 9TS